


Christy's™

— PRODUCT INFORMATION & SPECIFICATIONS —

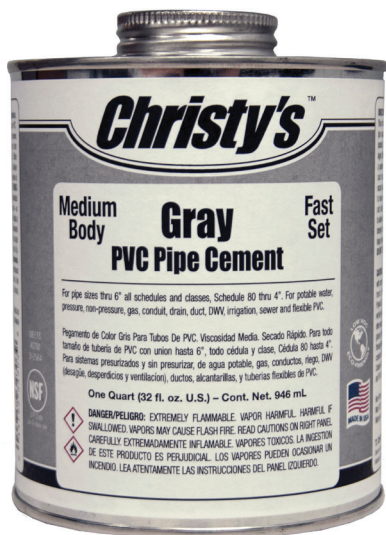

GRAY PVC PIPE CEMENT Medium Body | Fast Set

DESCRIPTION

- Industrial grade, gray low VOC emission
- All classes and schedules of pipe and fittings with interference fit through 6" (160 mm) diameter
- Schedule 80 through 4" (110 mm) diameter
- Use without primer on non-pressure systems if local codes permit
- Approved for pressure and non-pressure, potable and non-potable, water, turf, ag, conduit, foam core, sewer, DWV and flexible PVC piping
- See our website (www.tchristy.com) for a video on how to Solvent Weld PVC Pipe and Fittings
- Shelf life is 3 years in an unopened can from the date stamped on the can

SPECIAL CONSIDERATIONS

- Always use in a well-ventilated environment
- Wear safety glasses and gloves at all times
- Do not use a dry granular calcium hypochlorite as a disinfecting material for water purification in potable water piping systems
- Introduction of granules or pellets of calcium hypochlorite with PVC and CPVC solvent cements and primers (including their vapors) may result in a violent chemical reaction if water solution is not used
- Purify lines by pumping chlorinated water into the piping system – this solution will be non-volatile
- Dry granular calcium hypochlorite should not be stored or used near solvent cements or primers

This product is not for use in a system using or being tested with compressed air or gases.

PRODUCT SPECIFICATIONS

- Meets ASTM D 2564 Standard
- Meets SCAQMD rule 1168/316A
- Compliant with Leed® (Leadership in Energy and Environmental Design).
- Listed by NSF International for compliance with ASTM D 2564, NSF/ANSI Standard 14, and NSF/ANSI Standard 61 for use on potable water, drain, waste, vent and sewer applications.
- Product certified to Uniform Plumbing Code by NSF.
- Passes NSF Annex G testing which satisfies California Low Lead requirements for drinking water
- **COLOR**
Gray
- **VISCOSITY (Brookfield)** Medium body
Minimum 500 cP @ 73 ± 2°F (23° ± 1°C)
- **SPECIFIC GRAVITY**
Typical 0.95 to 0.9611 ± 0.01@23°C ± 2° (73°F ± 3.6°)
- **MAX VOC EMISSIONS**
510 g/l, per SCAQMD Rule 1168, Method 316A

Gray Medium PVC Pipe Cement

Part Number	Description	Case Pack
RH.MGLV.QP	Gray PVC/ Medium Body - ¼ Pint	24
RH.MGLV.HP	Gray PVC/ Medium Body - ½ Pint	24
RH.MGLV.PT	Gray PVC/ Medium Body - Pint	12
RH.MGLV.QT	Gray PVC/ Medium Body - Quart	12
RH.MGLV.1	Gray PVC/ Medium Body - Gallon	6

T. Christy Enterprises, Inc.
655 E Ball Rd • Anaheim, CA 92805
Tel: (714) 507-3300 • Fax: (714) 507-3310
www.tchristy.com • 800-BLU-GLUE